

RoHS

A4201WV-2xNP-XX XX X


Contact resistance: 20mΩ Max

SPECIFICATIONS

- Voltage rating:600V AC, DC
- Current rating:7A, AC, DC
- Withstanding Voltage:1500V, AC/mimute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ Max




WAFER

- Part No. :W4255VT-2xNP-XXXX
- Poles : 02-24P
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash
- Mates With:H4255 dual row receptacle
- The Dimension Marked “▽” Must Be Recorded

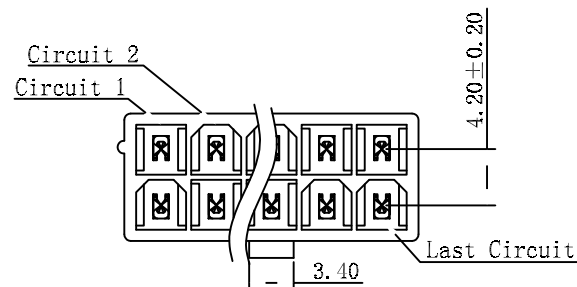

INSULATOR / COLOR
None:Pa66-V2 Natural
BK:Pa66-V2 Black
V0:Pa66-V0 Natural
V0BK:Pa66-V0 Black
LP:LCP-V0 Natural
LPBK:LCP-V0 Black
9T:PA9T-V0 Natural
9TBK:PA9T-V0 Black

CONTACT FINISH
None: Tin-plated
Tin Thickness=100u"
Nickel Thickness=50u"
SW: Tin Plating Fog
G: Gold-flash
G3: 3u" Gold
G10: 10u" Gold
G15: 15u" Gold

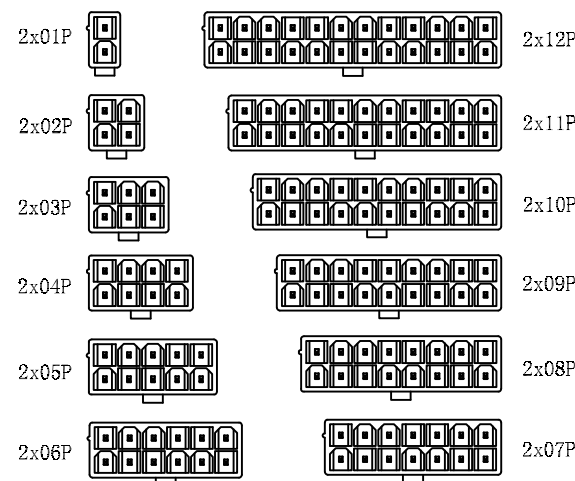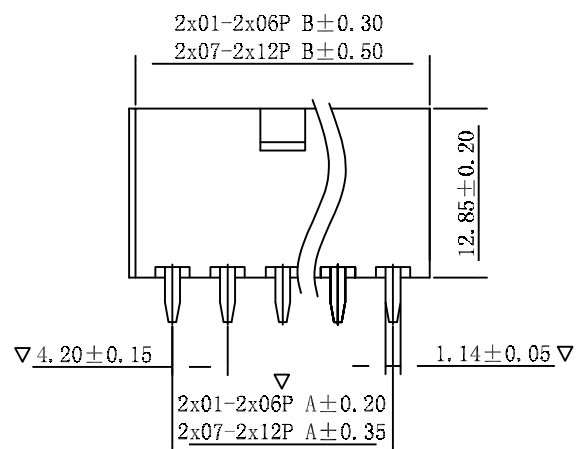

PART NO.	Dimensions(mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

P.C.B LAYOUT

CIRCUIT SIZE LAYOUT

一般公差
GENERAL
TOLERANCE:

0 ± 0.30
.0 ± 0.25
.00 ± 0.20
.000 ± 0.05
ANGLE: ± 1°

DXS.com

东莞市鼎新盛科技有限公司

DongGuan DXS Technolic CO,;Ltd

投影法
Projection
单位/Unit
MM
比例/Scale
1:1
大小/SIZE
A4
页码/SHEET
1/1
版本/Rev
C

品名
(PART NEME)

料号
(PART NO)

MX4. 20mm 180° Wafer
Connector Series

A4201WV-2xNP-XXXXX

A

新版本

2022-06-05

陈鼎坤

版次
REV.

说明
DESCRIPTION.

日期
DATE.

承认
APPRO.

绘图/DR

审核/CHECK

核准/APPRO

日期/DATE

2022-06-05